


Nelsonite Pigmented Concrete Slide Coatings

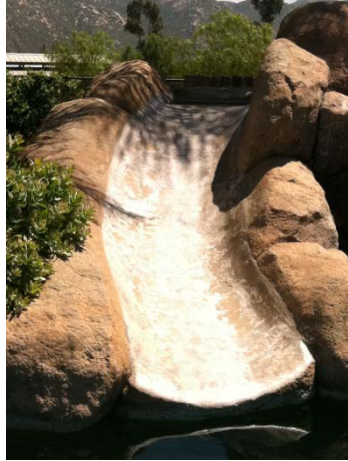

- Remove all contaminants with TSP or Solvent wipe
- Mechanically remove as much of existing coating as possible; fill all cracks with epoxy, grind cracks and surface area to be coated smooth
- Etch with muriatic acid; neutralize with baking soda
- Test with beads of water to see if they absorb; if not, repeat
- If old coating remains or surface is extremely rough, prime with PoolPoxy II, thinned 10-15% with acetone.
- Apply two coats Dive and Slide urethane approx. 30 minutes apart with a 3/8 inch roller that has had fuzzies removed by wrapping with masking tape then removing tape
- Always paint in the late afternoon to avoid outgassing.